

FORM PTO-1390 U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE REV. 2/01T		ATTORNEY'S DOCKET NUMBER 01190.0006
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371		U.S. APPLICATION NO. (If known, see 37CFR1.5) 10/069483
INTERNATIONAL APPLICATION NO. PCT/IS00/00007	INTERNATIONAL FILING DATE August 29, 2000	PRIORITY DATE CLAIMED August 31, 1999
TITLE OF INVENTION A THERMAL PROCESSING CHAMBER AND A METHOD OF THERMALLY PROCESSING PRODUCTS		
APPLICANT(S) FOR DO/EO/US Ingolfur ARNASON and Gardar NORDDAHL		
Applicant(s) herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:		
1.	<input checked="" type="checkbox"/>	This is a FIRST submission of items concerning a filing under 35 U.S.C 371.
2.	<input type="checkbox"/>	This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.
3.	<input type="checkbox"/>	This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.
4.	<input checked="" type="checkbox"/>	The US has been elected by the expiration of 19 months from the priority date (Article 31).
5.	<input checked="" type="checkbox"/>	A copy of the International Application as filed (35 U.S.C. 371 (c)(2)).
	a.	<input checked="" type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau.
	b.	<input type="checkbox"/> has been communicated by the International Bureau.
	c.	<input type="checkbox"/> is not required, as the application was filed with the United States Receiving Office (RO/US).
6.	<input type="checkbox"/>	An English language translation of the International Application as filed (35 U.S.C. 371 (c)(2)).
	a.	<input type="checkbox"/> is attached hereto.
	b.	<input type="checkbox"/> has been previously submitted under 35 U.S.C. 154 (d)(4).
7.	<input checked="" type="checkbox"/>	Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3)).
	a.	<input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau).
	b.	<input type="checkbox"/> have been communicated by the International Bureau.
	c.	<input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.
	d.	<input checked="" type="checkbox"/> have not been made and will not be made.
8.	<input type="checkbox"/>	An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).
9.	<input type="checkbox"/>	An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10.	<input checked="" type="checkbox"/>	The annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
Items 11 to 20 below concern document(s) or information included:		
11.	<input type="checkbox"/>	Information Disclosure Statement under 37 CFR 1.97 and 1.98
12.	<input type="checkbox"/>	An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13.	<input type="checkbox"/>	A FIRST preliminary amendment.
14.	<input type="checkbox"/>	A SECOND or SUBSEQUENT preliminary amendment.
15.	<input type="checkbox"/>	A Substitute specification.
16.	<input type="checkbox"/>	A change of power of attorney and/or address letter.
17.	<input type="checkbox"/>	A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821-1.825.
18.	<input type="checkbox"/>	A second copy of the published international application under 35 U.S.C. 154 (d)(4).
19.	<input type="checkbox"/>	A second copy of the English language translation of the international application 35 U.S.C. 154 (d)(4).
20.	<input checked="" type="checkbox"/>	Other items or information:
	a.	<input checked="" type="checkbox"/> Copy of cover page of International Publication No. WO 01/16537 A2
	b.	<input type="checkbox"/> Copy of Notification of Missing Requirements.
	c.	<input type="checkbox"/>

U.S. APPLICATION NO. (If known, see 37CFR 1.5) <div style="font-size: 1.5em; font-weight: bold; margin-top: 10px;">10/069483</div>		INTERNATIONAL APPLICATION NO. PCT/IS00/00007		ATTORNEY'S DOCKET NUMBER 01190.0006		
21. <input checked="" type="checkbox"/> The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1040.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$890.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search fee (37 CFR 1.445(a)(2)) paid to USPTO \$740.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$710.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33 (1)-(4) \$100.00 <div style="text-align: right; margin-right: 50px;">ENTER APPROPRIATE BASIC FEE AMOUNT =</div>					CALCULATIONS PTO USE ONLY	
Surcharge of \$130.00 for furnishing the oath or declaration later than months from the earliest claimed priority date (37 CFR 1.492 (e)). <input type="checkbox"/> 20 <input type="checkbox"/> 30					\$	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE			
Total Claims	23	- 20 =	3	x \$18.00	\$54.00	
Independent Claims	1	- 3 =		x \$84.00	\$	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)				+\$280 00	\$280.00	
TOTAL OF THE ABOVE CALCULATIONS =					\$1224.00	
X Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.					\$612.00	
SUBTOTAL =					\$612.00	
Processing fee of \$130.00 for furnishing the English translation later than months from the earliest priority date (37 CFR 1.492(f)). <input type="checkbox"/> 20 <input type="checkbox"/> 30					\$	
TOTAL NATIONAL FEE =					\$612.00	
Fee for recording the enclosed assignment (37 CFR 1.21 (h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property. +					\$	
TOTAL FEES ENCLOSED =					\$612.00	
					Amount to be refunded:	
					\$	
					charged:	
					\$	
a. <input checked="" type="checkbox"/> A check in the amount of \$ <u>612.00</u> to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>06-0916</u> . A duplicate copy of this sheet is enclosed. d. <input type="checkbox"/> Fees are to be charged to a credit card. WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.						
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.						
SEND ALL CORRESPONDENCE TO: Finnegan, Henderson, Farabow, Garrett & Dunner, L.L.P. 1300 I Street, N.W. Washington, D.C. 20005-3315						
DATED: February 27, 2002				<div style="text-align: center;"> SIGNATURE Ernest F. Chapman / 25,961 NAME/REGISTRATION NO. </div>		

10 Rec'd PCT/PTO

08 JUL 2002

#4

PATENT
Customer No. 22,852
Attorney Docket No. 01190.0006

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:)
)
Ingolfur ARNASON et al.) Group Art Unit: (Unknown)
)
National Stage of International Application)
No. PCT/IS00/00007) Examiner: (Unknown)
)
Application No.: 10/069,483)
)
Filed: February 27, 2002)
)
For: THERMAL PROCESSING)
CHAMBER AND A METHOD OF)
THERMALLY PROCESSING)
PRODUCTS)

Box PCT
Commissioner for Patents
Washington, DC 20231

Sir:

PRELIMINARY AMENDMENT

Prior to the examination of the above application, please amend this
application as follows:

IN THE CLAIMS:

Please cancel claims 1-23 without prejudice or disclaimer, and substitute the
following new claims 24-45 for the claims previously submitted with this application:

24. (New) A thermal processing chamber for processing individual product
items, said processing chamber comprising:

FINNEGAN
HENDERSON
FARABOW
GARRETT &
DUNNER LLP

1300 I Street, NW
Washington, DC 20005
202.408.4000
Fax 202.408.4400
www.finnegan.com

- a conveyor for conveying the product items in the chamber, said conveyor comprising:

- a conveyor belt forming an endless loop with a processing part and an idling part, the conveyor belt comprising a plurality of thermal conductive elements, each of the elements being adapted to obtain a first orientation in the processing part of the loop and adapted to obtain a second orientation in the idling part of the loop, the first orientation providing a substantially plan and continuous surface for supporting the product items across at least a number of the elements and wherein the second orientation of the elements provides a passage between the elements so as to allow the gas to flow between the elements;

- means for providing a thermal media to the chamber; and

- power driven means for advancing the conveyor belt,

wherein thermal processing of the product items is performed by a thermal convection from the elements to the product items.

25. (New) A thermal processing chamber according to claim 24, wherein the thermal media is a gas.

26. (New) A thermal processing chamber according to claim 24, wherein the second orientation is adjustable so that the size of the passage is adjustable whereby the amount of gas flowing between the elements can be controlled.

27. (New) A thermal processing chamber according to claim 24, wherein the thermal conductive elements are parallel arranged elongated beams having a wing formed cross sectional shape.

FINNEGAN
HENDERSON
FARABOW
GARRETT &
DUNNER LLP

1300 I Street, NW
Washington, DC 20005
202.408.4000
Fax 202.408.4400
www.finnegan.com

28. (New) A thermal processing chamber according to claim 24, wherein the thermal processing of the product items is performed by a combination of a first thermal convection from the elements to the product items and a second thermal convection from the thermal media to the product items.

29. (New) A thermal processing chamber according to claim 24, wherein the elements are thermally influenced by a third thermal convection from the thermal media to the elements.

30. (New) A thermal processing chamber according to claim 29, wherein the thermal media is thermally influenced by a fourth thermal convection from the elements to the thermal media.

31. (New) A thermal processing chamber according to claim 24, wherein the thermal processing is freezing of the product items and wherein the thermal media is a cooling media.

32. (New) A thermal processing chamber according to claim 31, wherein the cooling media is selected from a group comprising:

- plain air,
- CO₂, and
- nitrogen.

33. (New) A thermal processing chamber according to claim 31, wherein the elements are cooled electrically.

34. (New) A thermal processing chamber according to claim 24, wherein the thermal processing is heating and wherein the thermal media is heated gas.

FINNEGAN
HENDERSON
FARABOW
GARRETT &
DUNNER LLP

1300 I Street, NW
Washington, DC 20005
202.408.4000
Fax 202.408.4400
www.finnegan.com

35. (New) A thermal processing chamber according to claim 34, wherein the elements are heated by electricity.

36. (New) A thermal processing chamber according to claim 24, wherein the elements are made from a thermal conductive material.

37. (New) A thermal processing chamber according to claim 36, wherein the thermal conductivity of the material is between 30 and 230 W/(K*m) such as between 209 W/(K*m) and 229 W/(K*m).

38. (New) A thermal processing chamber according to claim 24, wherein the elements are made from aluminum.

39. (New) A thermal processing chamber according to claim 24, wherein the elements are coated with a material with a low surface friction.

40. (New) A thermal processing chamber according to claim 24, wherein the elements are adapted to rotate from the first orientation to the second orientation upon movement of the elements in the endless loop from the processing part to the idling part of the loop and wherein the elements are adapted to rotate back from the second orientation to the first orientation upon movement of the element in the endless loop from the idling part to the processing part of the loop.

41. (New) A thermal processing chamber according to claim 40, wherein the rotation is driven by gravity.

42. (New) A thermal processing chamber according to claim 24, further comprising an additional conveyor with a conveyor belt forming an endless loop, the conveyor belt having a partly open surface towards the thermal media.

FINNEGAN
HENDERSON
FARABOW
GARRETT &
DUNNER LLP

1300 I Street, NW
Washington, DC 20005
202.408.4000
Fax 202.408.4400
www.finnegan.com

43. (New) A thermal processing chamber according to claim 24, wherein the product items are food items.

44. (New) A method of thermally processing product items in a thermal processing chamber provided with a thermal media, said method comprising the steps of:

- conveying the product items through the chamber on a plurality of thermally conductive elements;
- thermally processing the product by providing a thermal convection from the elements to the product items; and
- simultaneously providing a thermal convection from the thermal media to the product items.

45. (New) A method of processing product items in a thermal processing chamber according to any one of claims 24-43, said method comprising the steps of:

- conveying the product items through the chamber on a plurality of thermally conductive elements,
 - thermally processing the product by providing a thermal convection from the elements to the product items, and
- simultaneously providing a thermal convection from thermal media to the product items.

REMARKS

Applicant submitted Annexes to this application consisting of 5 pages containing amendments to Claims 1-21, and an additional Claim 21. In a Notification from the United States patent and Trademark Office dated May 7, 2002, it stated that the Annexes were not entered because they were not a page for page substitution of

FINNEGAN
HENDERSON
FARABOW
GARRETT &
DUNNER LLP

1300 I Street, NW
Washington, DC 20005
202.408.4000
Fax 202.408.4400
www.finnegan.com

the originally-filed pages. Submitted herewith are now pending claims 24-45 which incorporate the amendments to the claims in the Annexes and eliminate improper multiple claim dependency.


It is respectfully requested that the new claims be entered and considered by the Examiner.

If there is any fee due in connection with the filing of this Preliminary Amendment, please charge the fee to our Deposit Account No. 06-0916.

Respectfully submitted,

FINNEGAN, HENDERSON, FARABOW,
GARRETT & DUNNER, L.L.P.

Dated: July 8, 2002

By: 
Stephen L. Peterson
Reg. No. 26,325

ERNEST F. CHAPMAN
Reg. No. 25,961

FINNEGAN
HENDERSON
FARABOW
GARRETT &
DUNNER LLP

1300 I Street, NW
Washington, DC 20005
202.408.4000
Fax 202.408.4400
www.finnegan.com

5/PRTS

10/069483

JC19 Rec'd PCT/PTO 27 FEB 2002
PCT/IS00/00007

WO 01/16537

1

A THERMAL PROCESSING CHAMBER AND A METHOD OF THERMALLY
PROCESSING PRODUCTS

Field of the Invention

5 The present invention relates to thermal processing of items in a continuous process, especially food products. The invention relates to a chamber and a method for heating or freezing food products by a combination between thermal convection between a conveyor belt and the product and thermal convection between a cooling or heating medium and the product. The combination provides a better product quality and a higher capacity of
10 the chamber.

Description of the Prior Art

Devices and methods for continuously freezing or heating food products e.g. for form freezing the food products exist. Known devices typically have conveying means for
15 conveying the food products through either a heating or a freezing process. The conveying means are typically provided as conveyor belts with an open structure allowing either a cooling or a heating medium such as air to pass through the belt. The belts therefore have conveying surfaces which are non-uniform or rough and which typically causes unwanted structures in the food products as they are either heated or frozen while
20 being supported on the surface. Furthermore the non-uniformity gives a poor thermal convection from the surface of the conveyor belt to the food products and therefore the thermal efficiency of the devices is relatively low.

When sensitive or delicate food products, such as fish fillets are individually frozen, it is
25 necessary that the products obtain a stiff outer shape before the product is being handled further, otherwise the value of the product may be lowered. It is therefore essential that the form freezing of the products is completed in one process. In order to ensure the form stability the known tunnel freezers or IQF (Individual quick freezer) installations have relatively long form freezing conveyor belts and therefore the known freezers take up
30 relatively much space. The same problem applies for devices for continuous heating such as for conveyor ovens.

The known devices typically use conveyer belts wherein a cooling or a heating medium is blown onto the food items either from the side of the belt or from above the belt. Sufficient cooling or heating is achieved by extending the length of the conveyer belts and thereby the size of the chamber. This can be a problem e.g. when the chamber is installed in
5 ships or in other places with limited space.

Description of the Invention

It is an object of the present invention to provide a method and a device for continuously processing sensitive food products wherein the efficiency of the processing is improved so
10 that the quality of the product can be improved with the use of less space for the device.

According to the object the present invention relates to a thermal processing chamber for processing individual product items, said processing chamber comprising:

- 15 – a conveyor for conveying the product items in the chamber, said conveyor comprising:
 - a conveyor belt forming an endless loop with a processing part and an idling part, the conveyor belt comprising a plurality of thermal conductive elements, each of the elements being adapted to obtain a first orientation in the processing part of the loop
20 and adapted to obtain a second orientation in the idling part of the loop, the first orientation providing a substantially plan and continuous surface for supporting the product items across at least a number of the elements, and
 - power driven means for advancing the conveyor belt,
- 25 wherein the thermal processing of the product items is performed by a thermal convection from the elements to the product items.

The power driven means could be regular AC/DC motors with a control system adapted for controlling the position and speed of the conveyor belt. The control system could be
30 integrated in an industrial PC, which could also be used for the control of the chamber in general, e.g. for the control of the temperature of the chamber or for the control of the processing of the product items.

The chamber may further have means for providing a thermal media to the chamber. The
35 thermal media could be a gas such as plain air, which is either relatively hot or cold.

- The second orientation of the elements could preferably be adapted so that a passage is provided between the elements. This will allow the cold or hot air to flow between the elements and thereby ensure a good distribution of the cold or hot medium in the
- 5 chamber. At the same time it will allow the medium to cool the elements down or heat them up before they re-enter the processing part of the loop. Preferably the second orientation is adjustable so that the size of the passage can be adjusted, e.g. so that the amount of gas flowing between the elements can be controlled.
- 10 The thermal conductive elements could be parallel arranged elongated beams having a wing formed cross sectional shape. By arranging each of the beams pivotally around a longitudinal centre axis of the beams, the first orientation of the beams may provide a flat and continued surface across a number of the beams. The second orientation of the beams may provide an open structure with good conditions for the flow of the medium
- 15 between the beams.
- The thermal processing of the product items is preferably performed as a combination of a first thermal convection from the elements to the product items and a second thermal convection from the thermal media to the product items.
- 20 The elements could be thermally influenced by a thermal convection from the thermal media to the elements or the thermal media could be influenced by a thermal convection from the element. As an example the elements could be either cooled down or heated up with cold or hot air flowing in between the elements or the air flowing in between the
- 25 elements could be either heated or cooled down by the elements. The one or the other situation could be selected based upon which heating or cooling procedure that would be beneficial for a specific case. In a regular cooling process it would make most sense to let the elements be cooled down with cold air produced in a regular cooling element, e.g. comprising a compressor and an evaporator. In a regular heating process on the other
- 30 hand, it may make more sense to let the air be heated as it passes the elements, which are heated, from internal electric heating elements.

According to one embodiment of the invention the thermal processing is freezing of the product items and accordingly the thermal media is a cooling media, which could be selected from a group comprising:

- 5 – plain air,
- CO₂, and
- nitrogen.

The elements could also cooled electrically, e.g. by internal thermoelectric elements.

10

According to another embodiment of the invention the thermal processing is heating and accordingly the thermal media is heated gas such as heated air. The air could be heated in a heat exchanger or the air could be heated by the elements, which again could be heated by internal electric heating elements.

15

Preferably the elements are made from a material with a good thermal conductivity such as aluminium. It has been found that a conductivity between 30 W/(K*m) and 230 W/(K*m), such as between 209 W/(K*m) and 229 W/(K*m) is preferred in order to obtain an efficient cooling or heating of the product items positioned on the elements. W is the
20 conducted energy, K is degrees Kelvin and m is the length of the material.

The elements could be coated with a material with a low surface friction for the working temperature. As an example the elements could be coated with PTFE (Teflon™) or a similar plastic material. The coating enables the products to fall off the conveyor at the
25 end of the processing part of the loop, and not stick to the surface of the elements after either a freezing of the products or after a heating of the products. The coating could further protect the elements from corroding. Preferably the elements or the beams are made from deep drawn aluminium profiles which after a chemical sintering is coated with Teflon™.

30

The elements could be adapted to rotate from the first orientation to the second orientation upon movement of the elements in the endless loop from the processing part to the idling part of the loop. The rotation could be caused by gravity in that the elements or beams simply falls from the first orientation around a pivotal hinge into the second
35 orientation. The elements could then be adapted to rotate back from the second

orientation to the first orientation upon movement of the element in the endless loop from the idling part to the processing part of the loop. The rotation could again be caused by gravity in that the elements and the beams are rotating as they are raised vertically in a circular movement, e.g. around a support or driving wheel of the conveyor. The rotation of
5 the elements or beams could be stopped in the second orientation wherein the elements or beams are supported, e.g. by the succeeding element or beam in the loop.

The thermal chamber may be provided with a number of additional conveyors. The additional conveyors could be provided with belts having a partly open surface towards
10 the thermal media. As an example the belts can be regular plastic belts with a 20, 30 or even 40 percent open structure allowing the thermal media to path through the belts. Such belts would not support thermal convection directly from the belt to the product items but would support the thermal media to flow through the belt and therefore support the convection from the thermal media to the product. The convection e.g. from air to the
15 product would not be as effective as convection directly from a belt to a product fully supported on the surface of the belt. Still the convection is relatively effective in the case the products are not lying firmly against the surface of the belt anyway and that would typically be the case after the products have been thrown from one belt to another. The plastic belts or similar regular belts can be used e.g. to full freeze the products by
20 convection between the air and the products.

According to a preferred embodiment of the invention the product items are food items such as fish, meat, cake, bread etc. Accordingly the materials selected for the chamber should be adapted for the purpose of hygienic treatment. Typically the extensive use of
25 non-corrosive materials such as stainless steel and plastic would be preferred.

According to another aspect the invention relates to a method of thermally processing product items in a thermal processing chamber provided with a thermal media, said method comprising the steps of:

30

- conveying the product items through the chamber on a plurality of thermally conductive elements,
- thermally processing the product by providing a thermal convection from the elements to the product items, and

- simultaneously providing a thermal convection from the thermal media to the product items.

5 Detailed description of the invention

A preferred embodiment of the invention adapted for continuously freezing food products, will now be described in details with reference to the drawing in which:

10 Fig. 1 shows a processing chamber according to the present invention,

Fig. 2 shows a processing chamber with an in-feed area and a discharge area, seen from the side,

15 Fig. 3 shows a detailed view of a conveyor belt for a form freezing conveyor,

Fig. 4 shows the view of Fig. 3 including indication of a stream of air flowing through the conveyor belt, and

20 Fig. 5 shows a view of the conveyor belt of Figs. 3 and 4 with an in-feed unit.

The processing chamber is used for freezing the food products individually. The products may be fish fillets or similar pieces of meat and they are frozen individually so that they keep their shape and don't stick together. By individually freezing the items it is possible to
25 increase the value of the products and to maximise the values added in the production process.

The food products are cooled partially by means of convection between a form freezing conveyor belt and the food and partly by means of convection between cold air in the
30 cooling chamber and the food. The temperature in the cooling chamber is approximately minus 38 degrees Celsius, which gives a fast and efficient cooling.

By means of a faster cooling of the products, the time period in which the products are exposed to a strong stream of cooling air is shortened. Therefore the frozen products

losses less amount of water and therefore the yield and quality of the final products is higher.

Referring to Fig. 1 the processing chamber comprises an in-feed unit 1, an upper form freezing conveyor belt 2, a lower form freezing conveyor belt 3, an upper full freezing conveyor belt 4, a lower full freezing conveyor belt 5, a chute 7 for conveying products out of the chamber, a chute 8 for the transfer of products between the full freezing conveyor belts 4 and 5, a cabinet 14 and a door 17 adapted for the purpose of cleaning and maintenance.

10

As best seen in Fig. 2 the in-feed unit 1 divides the products into a number of form freezing conveyor belts - Fig. 2 shows two form freezing belts 2,3. The in-feed unit is positioned so that the food items are being moved to the conveyor belt 2 where they are positioned flat against the upper surface of the conveyor belt 2. When the conveyor belt 2 is full, the conveyor belt is stopped and the in-feed unit 1 is moved down so that the food items are not moved to the conveyor belt 3 and the procedure is repeated. While the conveyor belt 3 is being filled, the food on conveyor belt 2 is given time to reach a form stable frozen shell. When conveyor belt 3 is full, the in-feed unit 1 is again moved to the conveyor belt 2, which again starts to convey new food item from the in-feed unit and into the chamber, while the now form stable, partly frozen items are thrown into a chute 6 and collected by the full freezing conveyor belt 4.

The chute 8 is adapted to receive or food products from the conveyor belt 4 and for intermediately storing the products before they are moved to the conveyor belt 5. The chute 8 could also be adapted for moving food products to a glazing unit before they re-enter the chamber onto conveyor belt 5.

The full frozen food products leave the chamber through the chute 7 for further processing or packing.

30

The evaporator is divided into a lower and an upper part 9, 10. The evaporator cools the chamber, e.g. by evaporation of CFC gases or by ammonia compressed by a compressor.

The ventilator 11 with the electric motor 12 is adapted for bringing cold air from the evaporator to the conveyor belts. The isolator 13 isolates the chamber from the ambience by counteracting airflow in and out of the chamber. The inlet to the chamber is also provided with an isolator 15.

5

The doors 16 and 17 are as mentioned before provided for inspection and maintenance of the chamber.

Referring to Fig. 3 the form freezing conveyor belts are made from a plurality of elongated
10 beams 18 connected in an endless belt by means of stainless steel chains 19. The steel chains may be of a regular type but according to a preferred embodiment, bolts 24 are inserted into holes in the end of each of the chain links and thus connect the links of the chain. The bolts are screwed into the elongated beams and thus simultaneously connect the individual links of the chain and connect the chain with the beams. Since the bolts are
15 allowed to rotate in the holes the beams are allowed to rotate as well.

The beams 18 are made from aluminium, but it could be made from any material having a good thermal conductivity. The aluminium profiles may preferably be coated with a plastic coating such as a PTFE or TeflonTM coating. The coating enables the form frozen food
20 items easily to drop of the belt instead of sticking to the belt and further protects the aluminium from corroding. The beams are provided with a wing shaped cross sectional shape enabling a turbulence free stream of air to pass through the passage 30 between the downward oriented beams. In addition the smooth shape of the surface increases the quality and thus the value of the form frozen product further.

25

The wing formed cross sectional shape of the beams provides a top part of the beams, when raised to a horizontal position, which top part forms a platform for form freezing of the products. The products lying on the platform quickly form freezes with a plan surface towards the plan platform, both due to the cooling inducted from the beams below the
30 products and due to the cooling from the cold air from above the products. After the from freezing the stiffness of the products hinders that the shape changes in the rest of the process when moving between the conveyors of the chamber. The very high heat convection capabilities of the aluminium beams ensures that the cooling of the products is extremely fast compared with the cooling of traditional conveyors made of plastic or made
35 of a steel grid where consequently only the thermal convection from cold air contributes to

the cooling. In the conveyor according to the present invention, both the surface freezing due to the thermal conductance of the cold aluminium and the cooling from the cold air is used.

- 5 The shape of the beams not only increases the air flow around the product but also ensures a homogen air flow, and controls the airflow in such a way that it hinders hot spots around the product. At the same time the beams are moving and therefore the air flow gets more homogen.
- 10 The frame 20 supports the chain wheel 32. The chain wheel is preferably made from PE plastic and attached between the two chain elements 25, so as to support the chain and thus the beams.

The arrow 22 indicates the direction of the conveyor belt.

15

The distance between each of the beams or the size of the beams is selected so that the end portion 26 of each of the beams is being supported by the top portion 27 of the succeeding beam when the beams are being lifted around the driving or supporting wheel 28. At the other end of the endless loop at the support or driving wheel 29, the beams fall

- 20 down into an orientation wherein they are freely hanging vertically downwards.

As seen in Fig. 3 the food products, such as a fish fillet 21 is supported on a plan, continuous upper surface across at least a number of the beams 18..

- 25 Now referring to Fig. 4 a stream of air 23 can flow from the side of the conveyor belt, partly over the belt and partly below the belt. As indicated, the part of the stream of air flowing below the belt can pass through the passage between the vertically hanging beams and onto the succeeding conveyor belt positioned below

- 30 It is essential for the freezing capacity as well as for the product quality that the food products are positioned precisely and flat against the surface of the form freezing conveyor belt. Referring to Fig. 5 the in-feed conveyor belt in the in-feed unit 1 should therefore preferably be provided with an end 31, which is adapted to convey the food to a point near the surface of the form freezing conveyor belt. The conveying speed of the
- 35 form freezing conveyor belt should be at least as fast or even faster than the conveying

speed of the in-feed conveyor belt. In that way the food products are pulled off the in-feed conveyor belt and that minimises the risk of the food products being twisted at the transfer between the two conveyors belts.

- 5 The full freezing conveyors 3 and 4 are made of PE-plastic with half open conveyer belts and with steel side-chains made of stainless steel on each side. By using steel side-chains and conveyor belts made of plastic, a heating expansion on the plastic conveyor can be reduced. The steel side-chain hinders the expansion of the plastic conveyor and has the same heat expansion coefficient as the frame, at a position where the conveyors
- 10 are. There it is not a to heat up the chamber e.g. for the defrosting of the evaporators. By defrosting the evaporator the temperature goes from appr. -38°C up to appr. 30°C and so there will be significant expansion of the regular plastic conveyors. This construction of the full freezing conveyors enables better glazing abilities than with the known constructions for full freezing, where glazing is performed after the product leaves the
- 15 freezer. During that procedure it may happen that the temperature of the products is lowered by the glazing so that the product loses its quality. Furthermore the products can freeze together which again lowers the price of the product.

The conveyors are driven by frequency controlled electrical gear motors which work

20 independently. On the end of these gear motors, impulse indicators are connected to sensors so that a control computer can count the pulses and therefrom calculate the location of each beam in the belt conveyor. A connected control computer, e.g. in the form of an industrial PC - not shown in the Figs. can therefore at all time track the exact loop position of the conveyors independently and therefrom regulate the system. The control of

25 the chamber may preferably be performed with a software code stored in the memory of the industrial computer.

Claims

1. A thermal processing chamber for processing individual product items, said processing chamber comprising:

5

- a conveyor for conveying the product items in the chamber, said conveyer comprising:
- a conveyor belt forming an endless loop with a processing part and an idling part, the conveyor belt comprising a plurality of thermal conductive elements, each of the
- 10 elements being adapted to obtain a first orientation in the processing part of the loop and adapted to obtain a second orientation in the idling part of the loop, the first orientation providing a substantially plan and continuous surface for supporting the product items across at least a number of the elements, and
- power driven means for advancing the conveyor belt,

15

wherein the thermal processing of the product items is performed by a thermal convection from the elements to the product items.

2. A thermal processing chamber according to claim 1, further comprising means for

20 providing a thermal media to the chamber.

3. A thermal processing chamber according to claim 2, wherein the thermal media is a gas.

25 4. A thermal processing chamber according to claim 3, wherein the second orientation of the elements provides a passage between the elements so as to allow the gas to flow between the elements.

5. A thermal processing chamber according to claim 4, wherein the second orientation is

30 adjustable so that the size of the passage is adjustable whereby the amount of gas flowing between the elements can be controlled.

6. A thermal processing chamber according to any of the preceding claims, wherein the thermal conductive elements are parallel arranged elongated beams having a wing

35 formed cross sectional shape.

15. A thermal processing chamber according to any of the preceding claims, wherein the elements are made from a thermal conductive material.

5 16. A thermal processing chamber according to claim 15, wherein the thermal conductivity of the material is between 30 and 230 W/(K*m), such as between 209 W/(K*m) and 229 W/(K*m).

17. A thermal processing chamber according to any of the preceding claims wherein the
10 elements are made from aluminium.

18. A thermal processing chamber according to any of the preceding claims, wherein the elements are coated with a material with a low surface friction.

15 19. A thermal processing chamber according to any of the preceding claims, wherein the elements are adapted to rotate from the first orientation to the second orientation upon movement of the elements in the endless loop from the processing part to the idling part of the loop and wherein the elements are adapted to rotate back from the second position to the first position upon movement of the element in the endless loop from the idling part
20 to the processing part of the loop.

20. A thermal processing chamber according to claim 19, wherein the rotation is driven by gravity.

25 21. A thermal processing chamber according to any of the preceding claims, further comprising an additional conveyor with a conveyor belt forming an endless loop, the conveyor belt having a partly open surface towards the thermal media.

22. A thermal processing chamber according to any of the preceding claims, wherein the
30 product items are food items.

23. A method of thermally processing product items in a thermal processing chamber provided with a thermal media, said method comprising the steps of:

- conveying the product items through the chamber on a plurality of thermally conductive elements,
 - thermally processing the product by providing a thermal convection from the elements to the product items, and
- 5 — simultaneously providing a thermal convection from the thermal media to the product items.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 March 2001 (08.03.2001)

PCT

(10) International Publication Number
WO 01/16537 A2

(51) International Patent Classification⁷: **F25D 3/00**

(21) International Application Number: **PCT/IS00/00007**

(22) International Filing Date: 29 August 2000 (29.08.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
5170 31 August 1999 (31.08.1999) IS

(71) Applicant (for all designated States except US): **SK-AGINN HF.** [IS/IS]; Bakkatuni 26, IS-300 Akranes (IS).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ARNASON, Ingolfur** [IS/IS]; Soleyjargotu 14, IS-300 Akranes (IS). **NORD-DAHL, Gardar** [IS/IS]; Sunnubraut 30, IS-300 Akranes (IS).

(74) Agent: **A & P ARNASON**; Borgartun 24, IS-105 Reykjavik (IS).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KR (utility model), KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— Without international search report and to be republished upon receipt of that report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **A THERMAL PROCESSING CHAMBER AND A METHOD OF THERMALLY PROCESSING PRODUCTS**

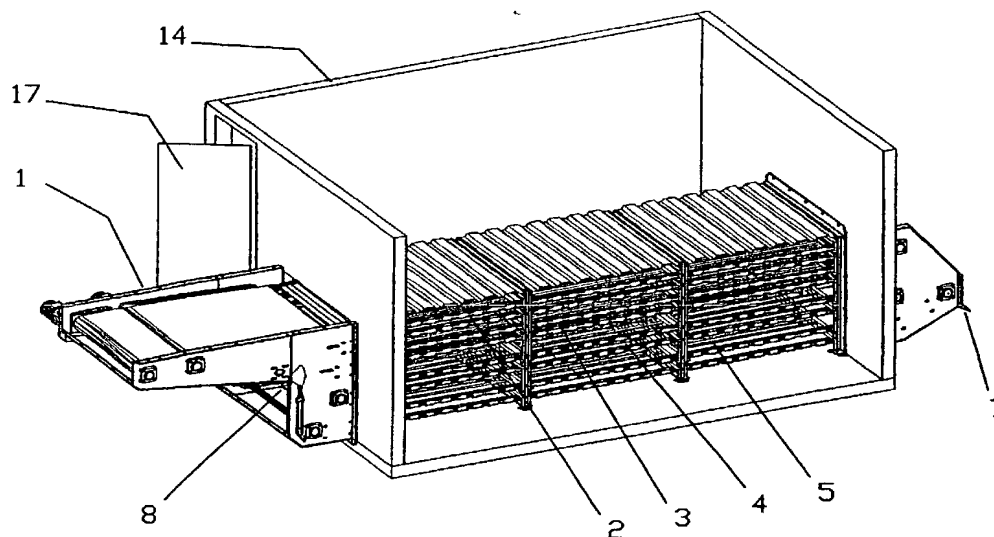

(57) Abstract: The present invention relates to a chamber and a method for continuous thermal processing of products being conveyed through the chamber. The thermal processing could be quick-freezing of fish or similar food items. The invention relates more specifically to a device and a method for processing the food items by means of thermal convection directly from a conveyor belt combined with thermal convection from an additional thermal source such as from the surrounding air. The combination of thermal induction provides a good performance e.g. for freezing products fast. The invention further relates to a conveyor belt for form stabilising the food items during the thermal process.

WO 01/16537 A2

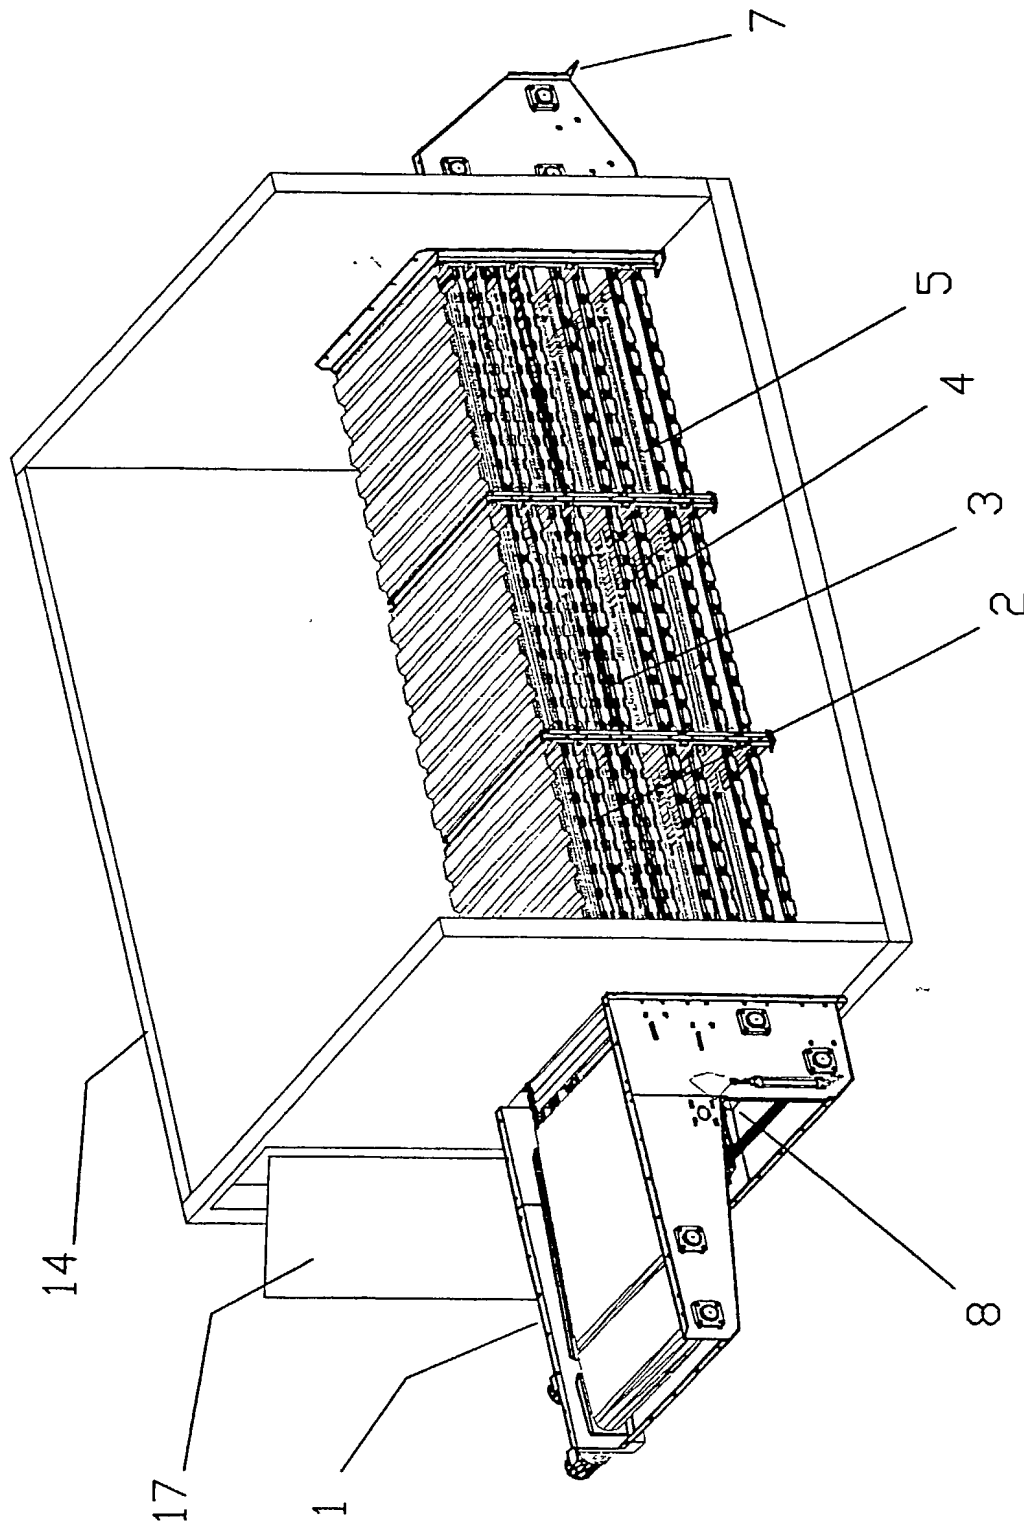


Fig. 1

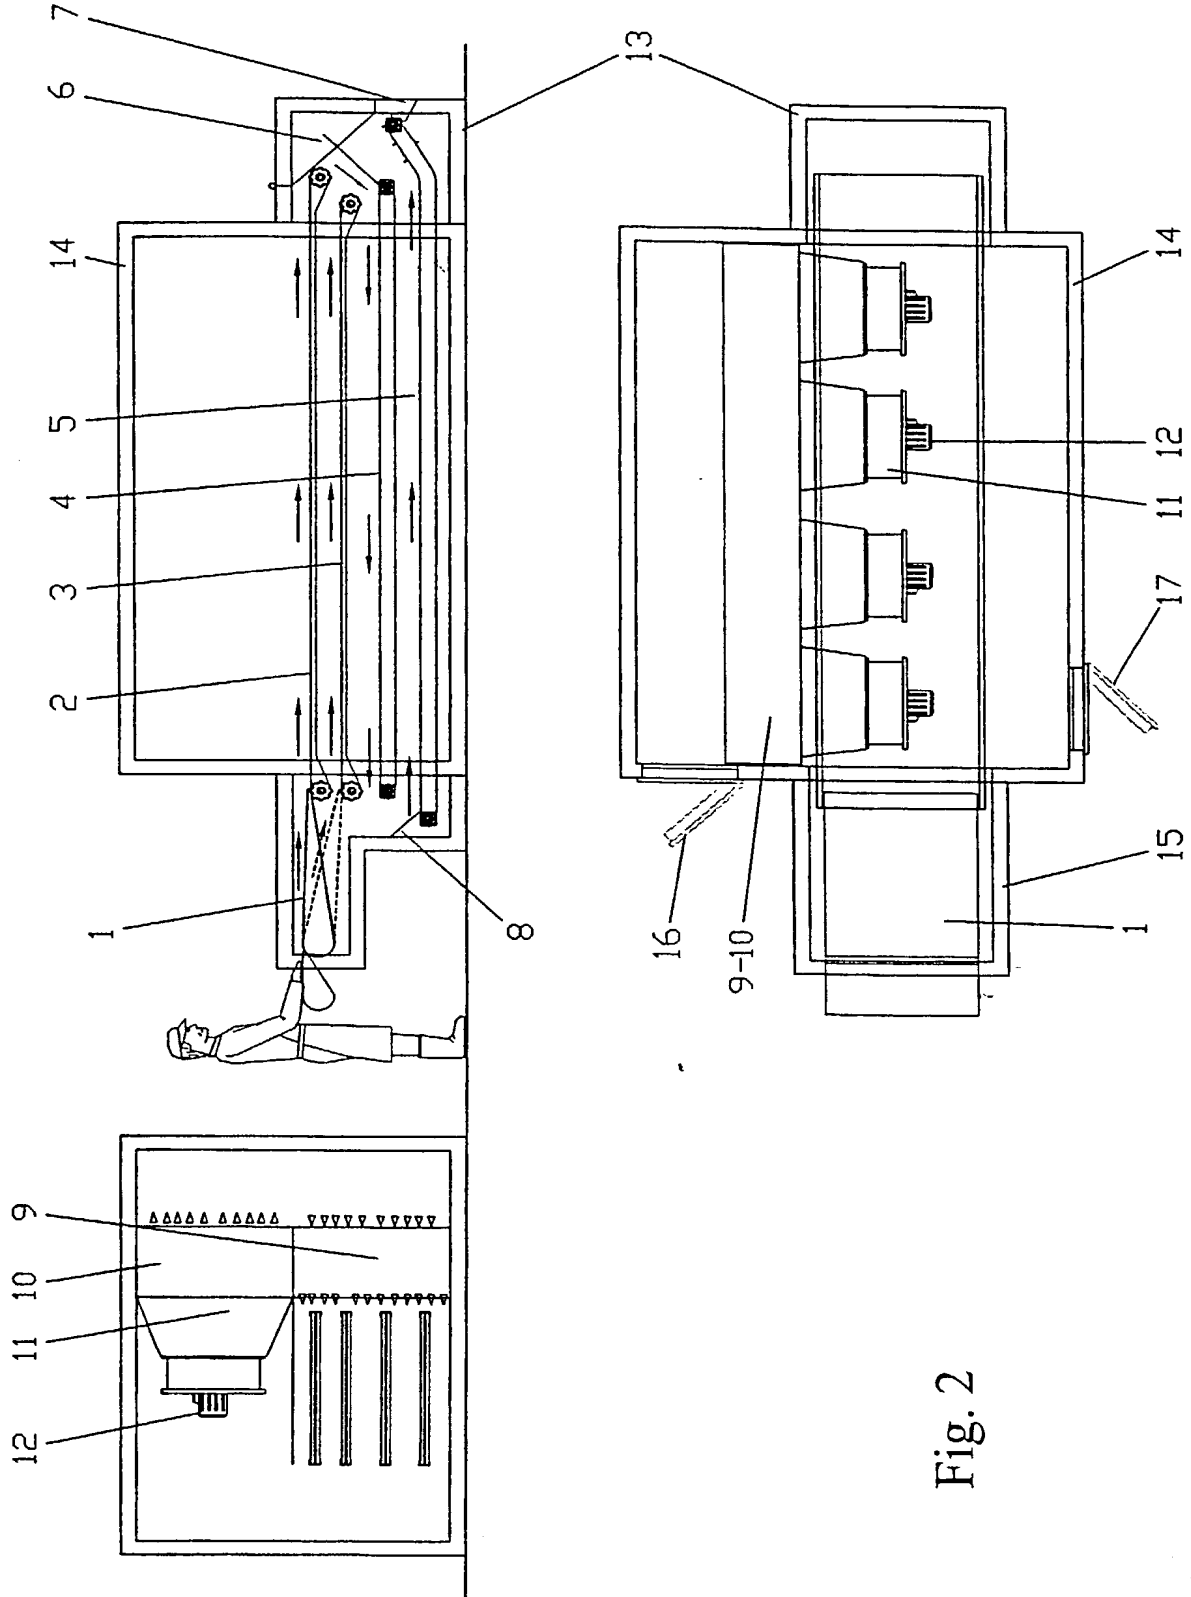


Fig. 2

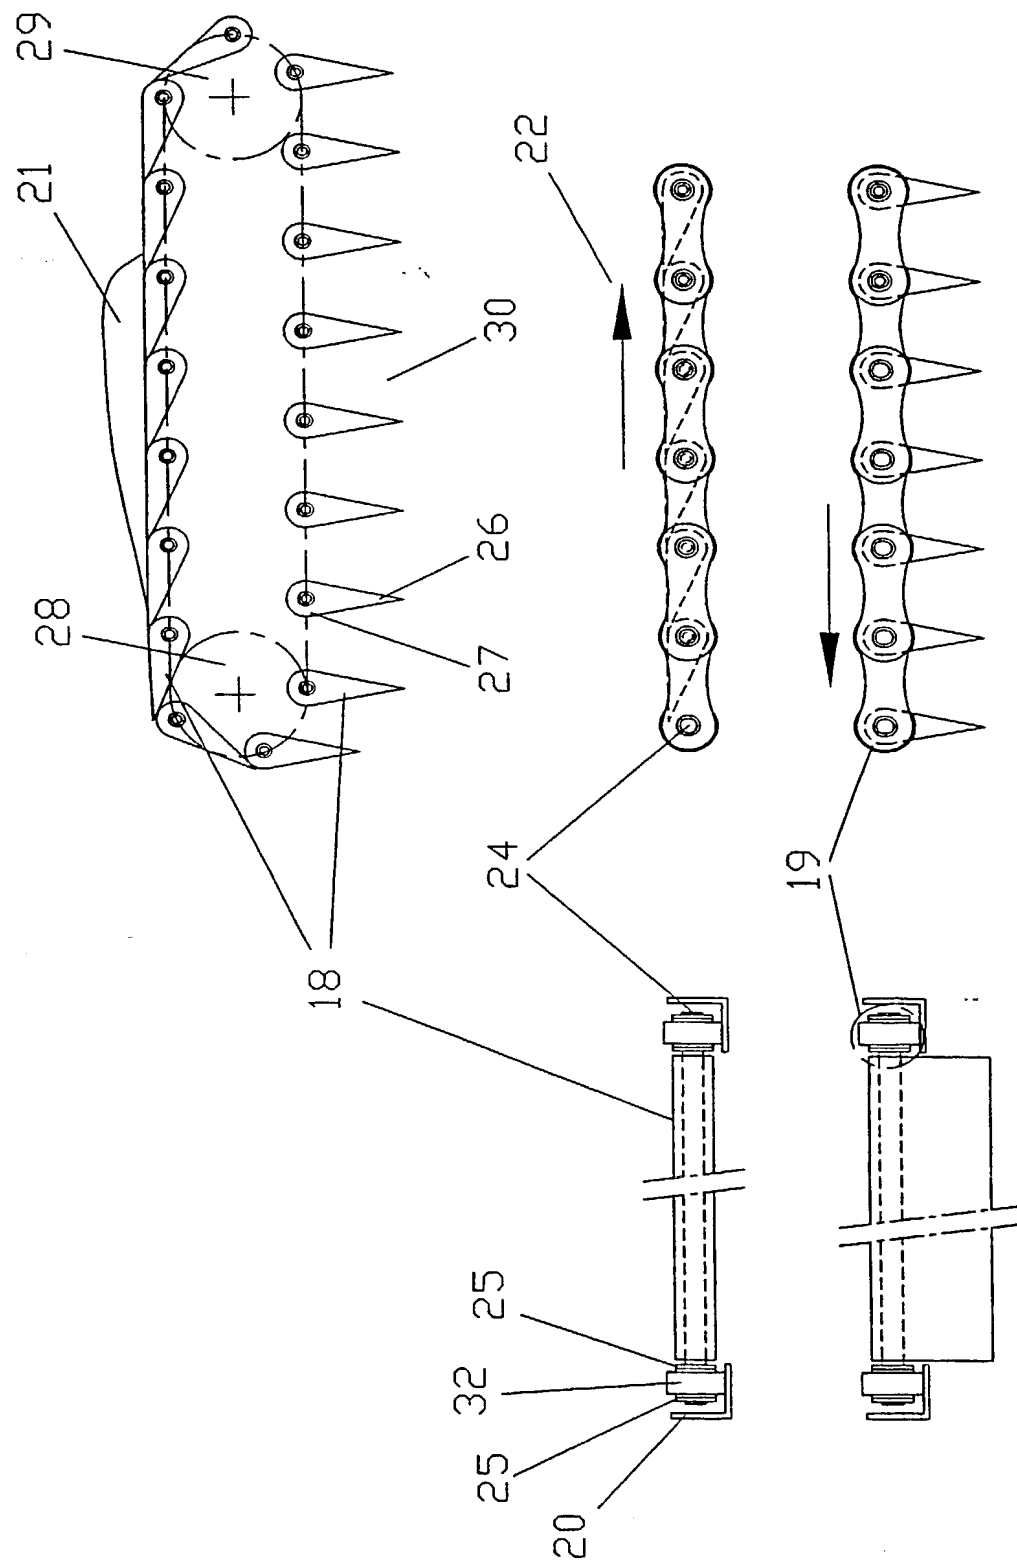


Fig. 3

10/069483

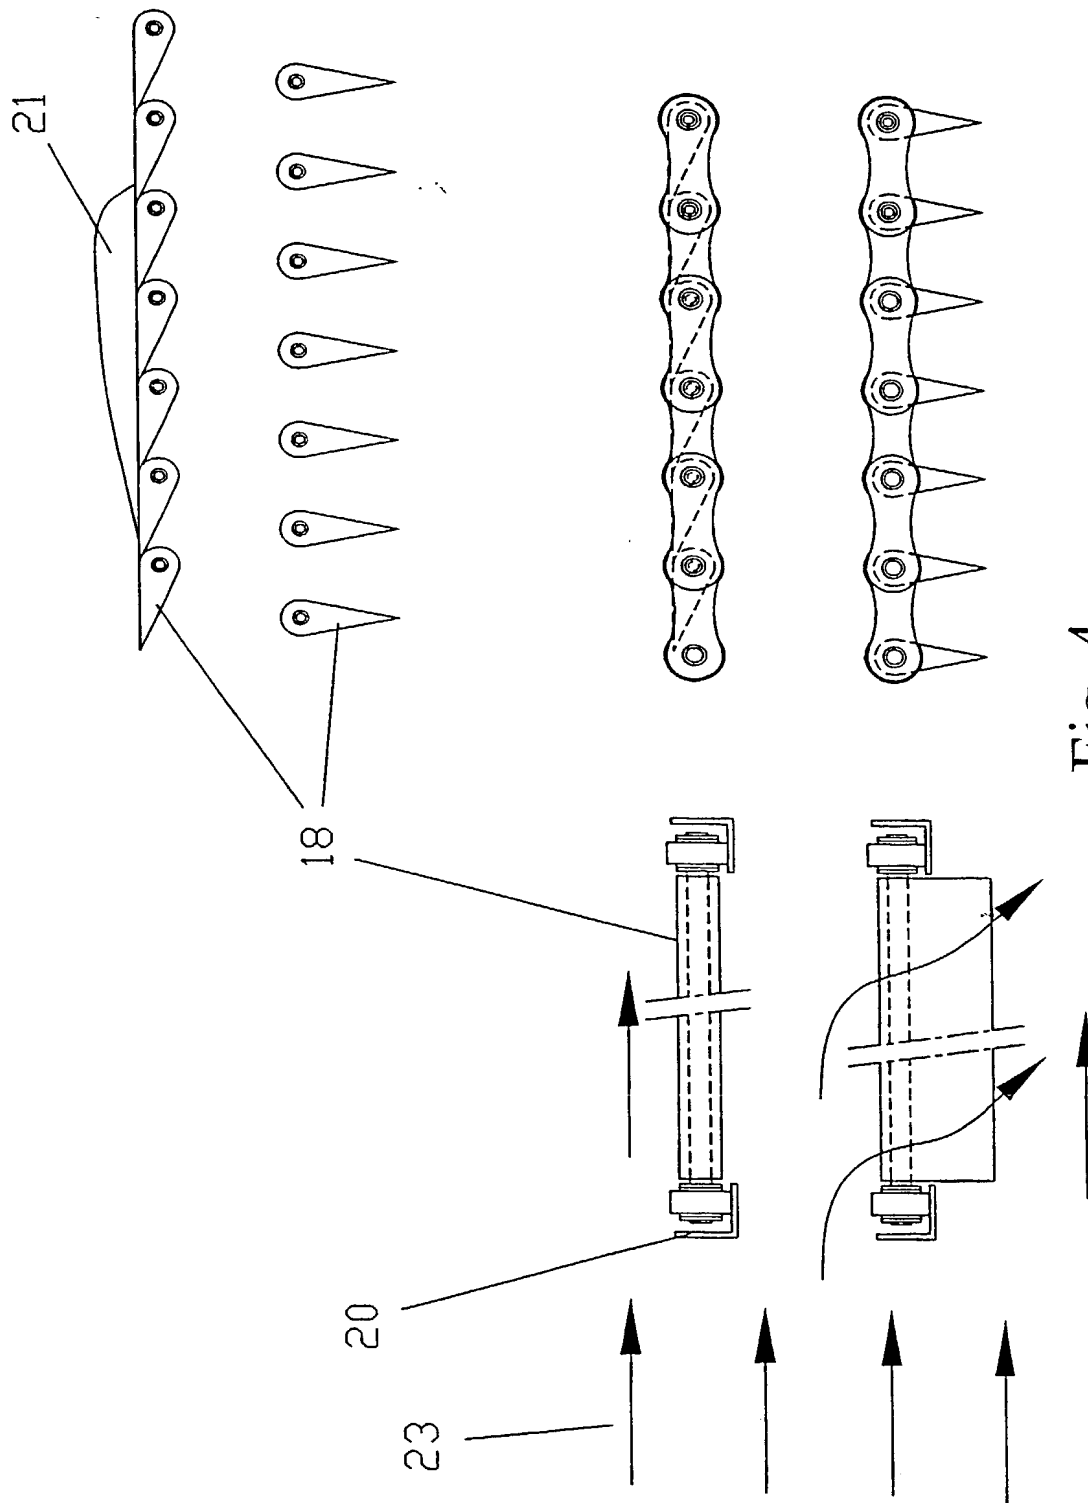


Fig. 4

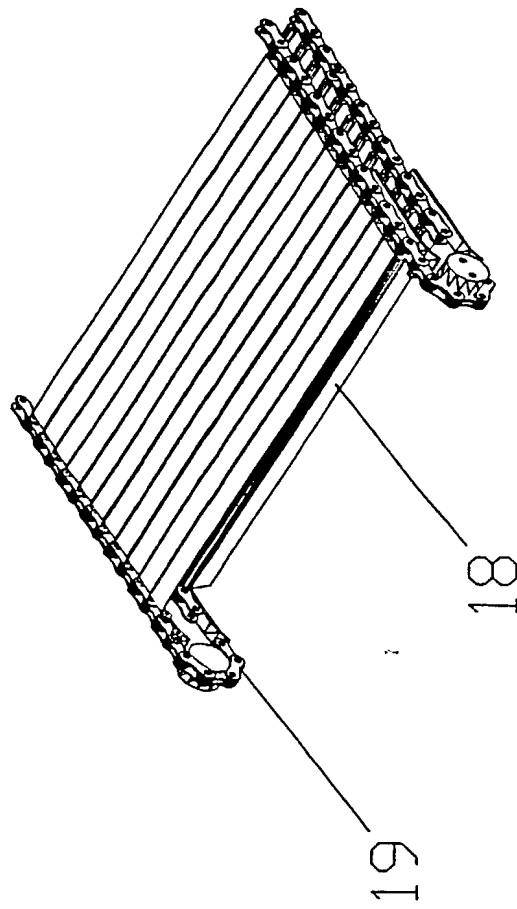
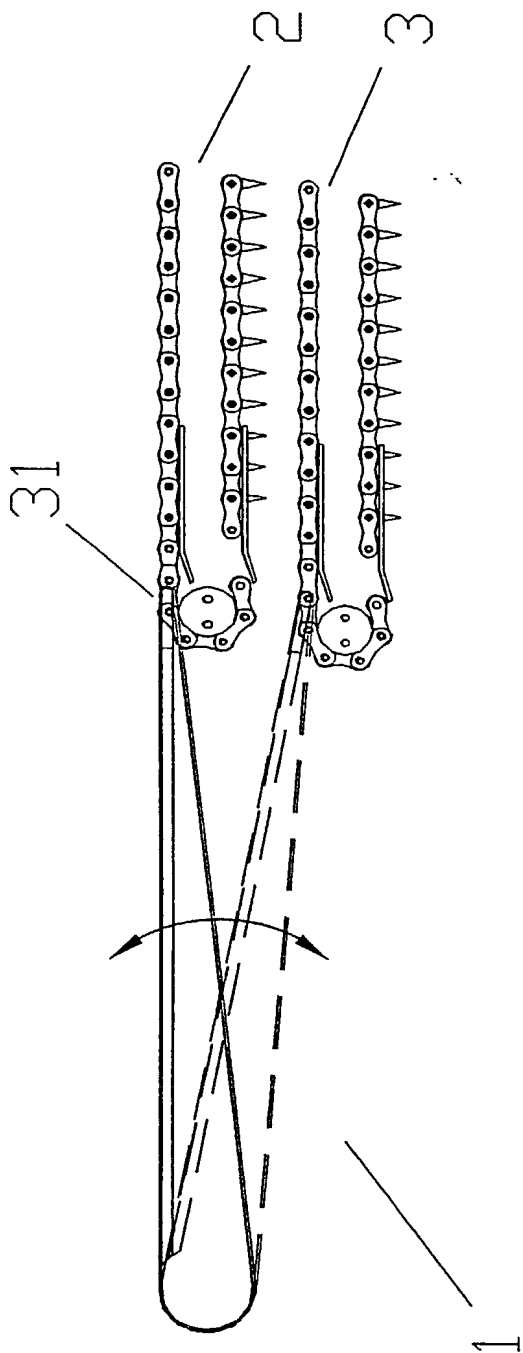



Fig. 5

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: A THERMAL PROCESSING CHAMBER AND A METHOD
OF THERMALLY PROCESSING PRODUCTS the specification of which ☐ is attached

and/or ☐ was filed on _____ as United States Application Serial No. _____ or PCT International Application No. _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate or § 365(a) of any PCT international application(s) designating at least one country other than the United States, listed below and have also identified below, any foreign application(s) for patent or inventor's certificate, or any PCT International application(s) having a filing date before that of the application(s) of which priority is claimed:

Country	Application Number	Date of Filing	Priority Claimed Under 35 U.S.C.
Iceland	5170	31.8.1999	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:

Application Number	Date of Filing

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) or § 365(c) of any PCT International application(s) designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application(s) in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application(s) and the national or PCT International filing date of this application:

Application Number	Date of Filing	Status (Patented, Pending, Abandoned)
PCT/IS00/00007	29.8.2000	Abandoned

I hereby appoint the following attorney and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P., Douglas B. Henderson, Reg. No. 20,291; Ford F. Farabow, Jr., Reg. No. 20,630; Arthur S. Garrett, Reg. No. 20,338; Donald R. Dunner, Reg. No. 19,073; Brian G. Brunsvold, Reg. No. 22,593; Tipton D. Jennings, IV, Reg. No. 20,645; Jerry D. Voight, Reg. No. 23,020; Laurence R. Hefter, Reg. No. 20,827; Kenneth E. Payne, Reg. No. 23,098; Herbert H. Mintz, Reg. No. 26,691; C. Larry O'Rourke, Reg. No. 26,014; Albert J. Santorelli, Reg. No. 22,610; Michael C. Elmer, Reg. No. 25,857; Richard H. Smith, Reg. No. 20,609; Stephen L. Peterson, Reg. No. 26,325; John M. Romary, Reg. No. 26,331; Bruce C. Zotter, Reg. No. 27,680; Dennis P. O'Reilly, Reg. No. 27,932; Allen M. Sokal, Reg. No. 26,695; Robert D. Bajefsky, Reg. No. 25,387; Richard L. Stroup, Reg. No. 28,478; David W. Hill, Reg. No. 28,220; Thomas L. Irving, Reg. No. 28,619; Charles E. Lipsey, Reg. No. 28,165; Thomas W. Winland, Reg. No. 27,605; Basil J. Lewrls, Reg. No. 28,818; Martin I. Fuchs, Reg. No. 28,508; E. Robert Yoches, Reg. No. 30,120; Barry W. Graham, Reg. No. 29,924; Susan Haberman Griffen, Reg. No. 30,907; Richard B. Racine, Reg. No. 30,415; Thomas H. Jenkins, Reg. No. 30,857; Robert E. Converse, Jr., Reg. No. 27,432; Clair X. Mullen, Jr., Reg. No. 20,348; Christopher P. Foley, Reg. No. 31,354; John C. Paul, Reg. No. 30,413; Roger D. Taylor, Reg. No. 28,992; David M. Kelly, Reg. No. 30,953; Kenneth J. Meyers, Reg. No. 25,146; Carol P. Einaudi, Reg. No. 32,220; Walter Y. Boyd, Jr., Reg. No. 31,738; Steven M. Anzalone, Reg. No. 32,095; Jean B. Fordis, Reg. No. 32,984; Barbara C. McCurdy, Reg. No. 32,120; James K. Hammond, Reg. No. 31,964; Richard V. Burguljan, Reg. No. 31,744; J. Michael Jakes, Reg. No. 32,824; Thomas W. Banks, Reg. No. 32,719; Christopher P. Isaac, Reg. No. 32,616; Bryan C. Diner, Reg. No. 32,409; M. Paul Barker, Reg. No. 32,013; Andrew Chanhon Sonu, Reg. No. 33,457; David S. Forman, Reg. No. 33,694; Vincent P. Kovalick, Reg. No. 32,867; James W. Edmondson, Reg. No. 33,871; Michael R. McGurk, Reg. No. 32,045; Joann M. Neth, Reg. No. 36,363; Gerson S. Panitch, Reg. No. 33,751; Cheryl M. Taylor, Reg. No. 33,216; Charles E. Van Horn, Reg. No. 40,266; Linda A. Wadler, Reg. No. 33,218; Jeffrey A. Berkowitz, Reg. No. 36,743; Michael R. Kelly, Reg. No. 33,921; and James B. Monroe, Reg. No. 33,971; and _____ Please address all correspondence to FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P. 1300 I Street, N.W., Washington, D.C. 20005, Telephone No. (202) 408-4000.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full Name of First Inventor <u>Ingolfur Arnarson</u>	Inventor's Signature <u>[Signature]</u>	Date <u>08.09.02</u>
Residence <u>Soleyjargata 14, Iceland</u>	Citizenship <u>Icelandic</u>	
Post Office Address		

Listing of Inventors Continued on Page 2 hereof. ☐ Yes ☐ No